

Fig. 1

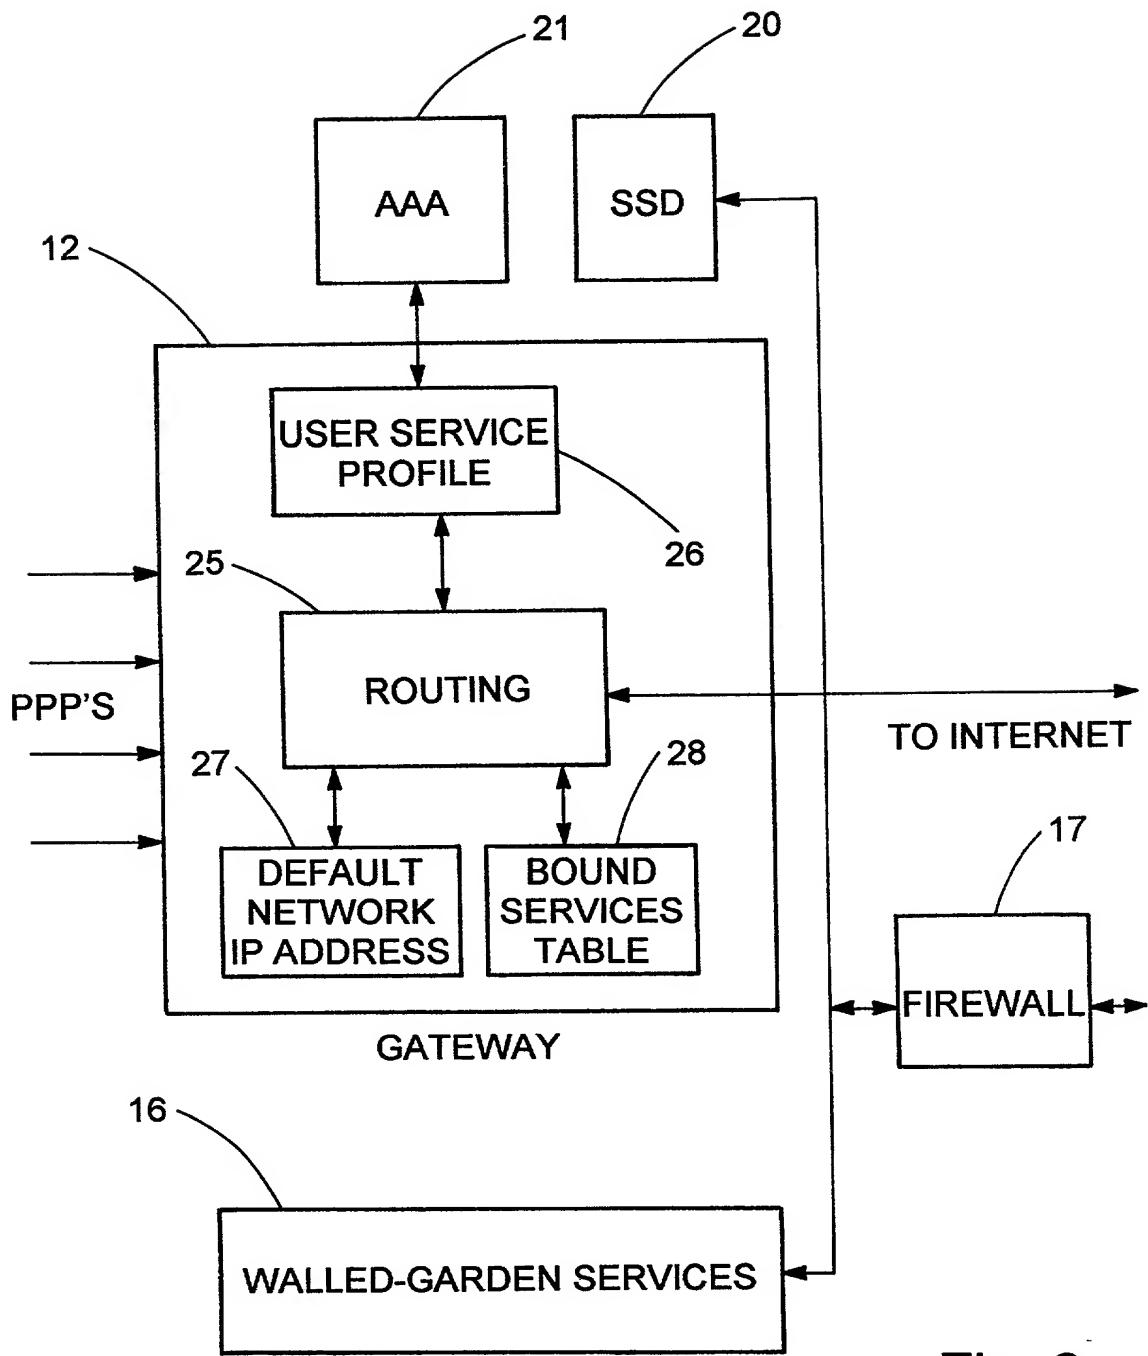


Fig. 2

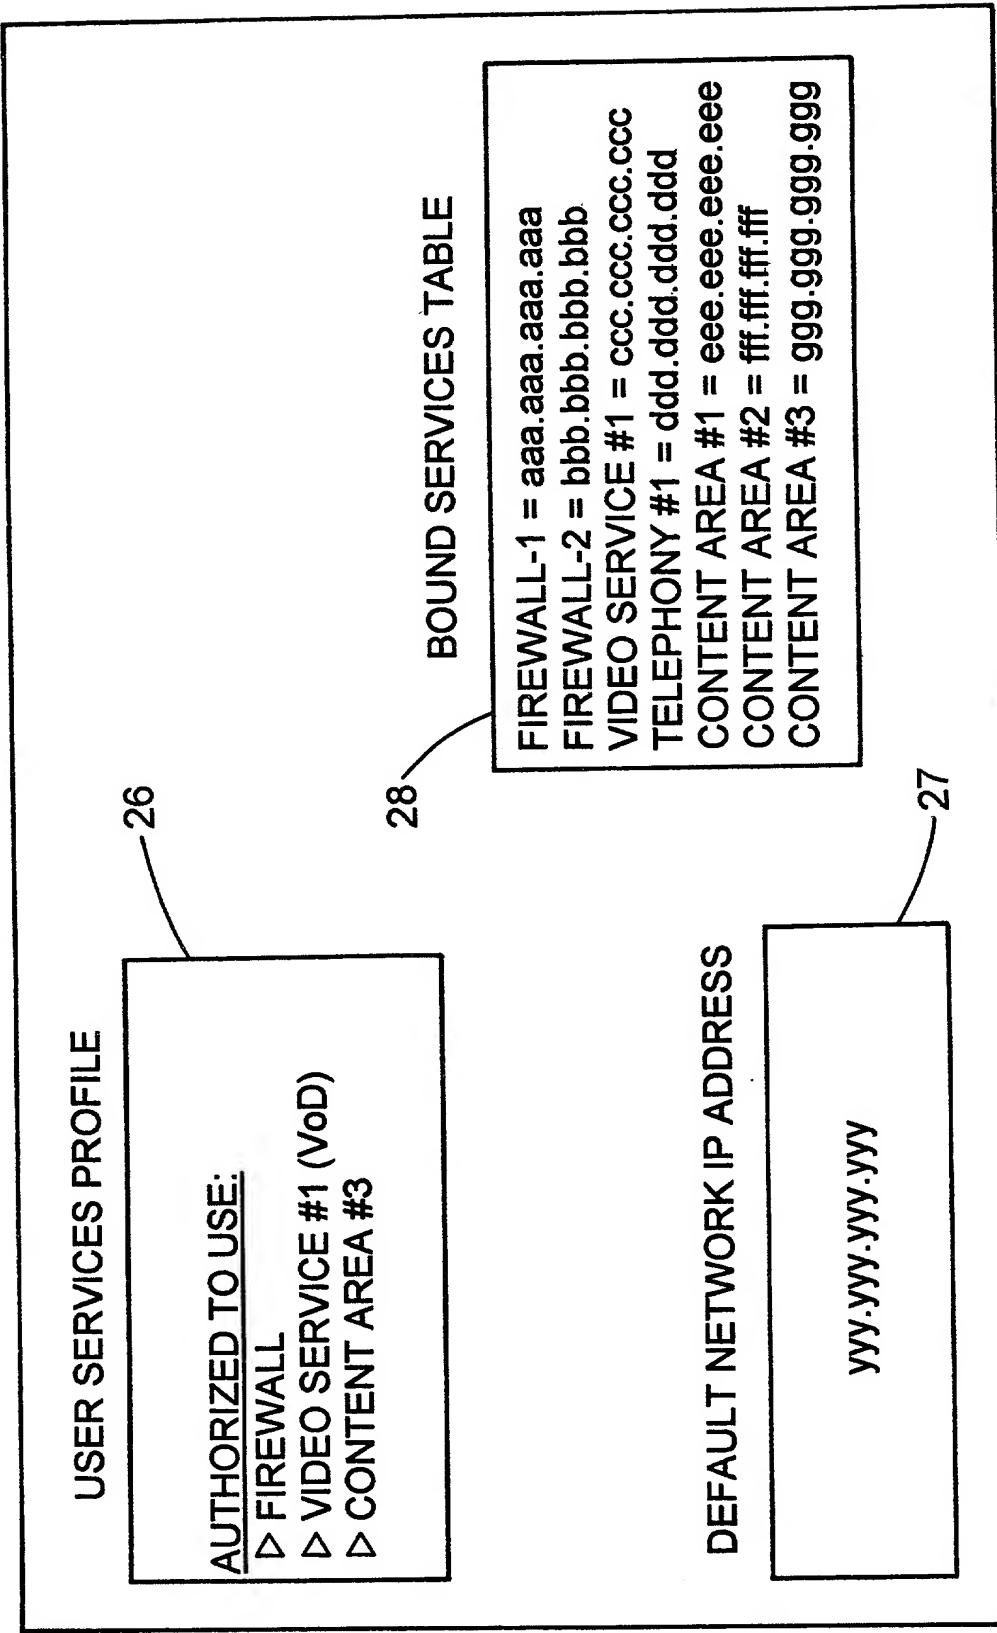


FIG. 3

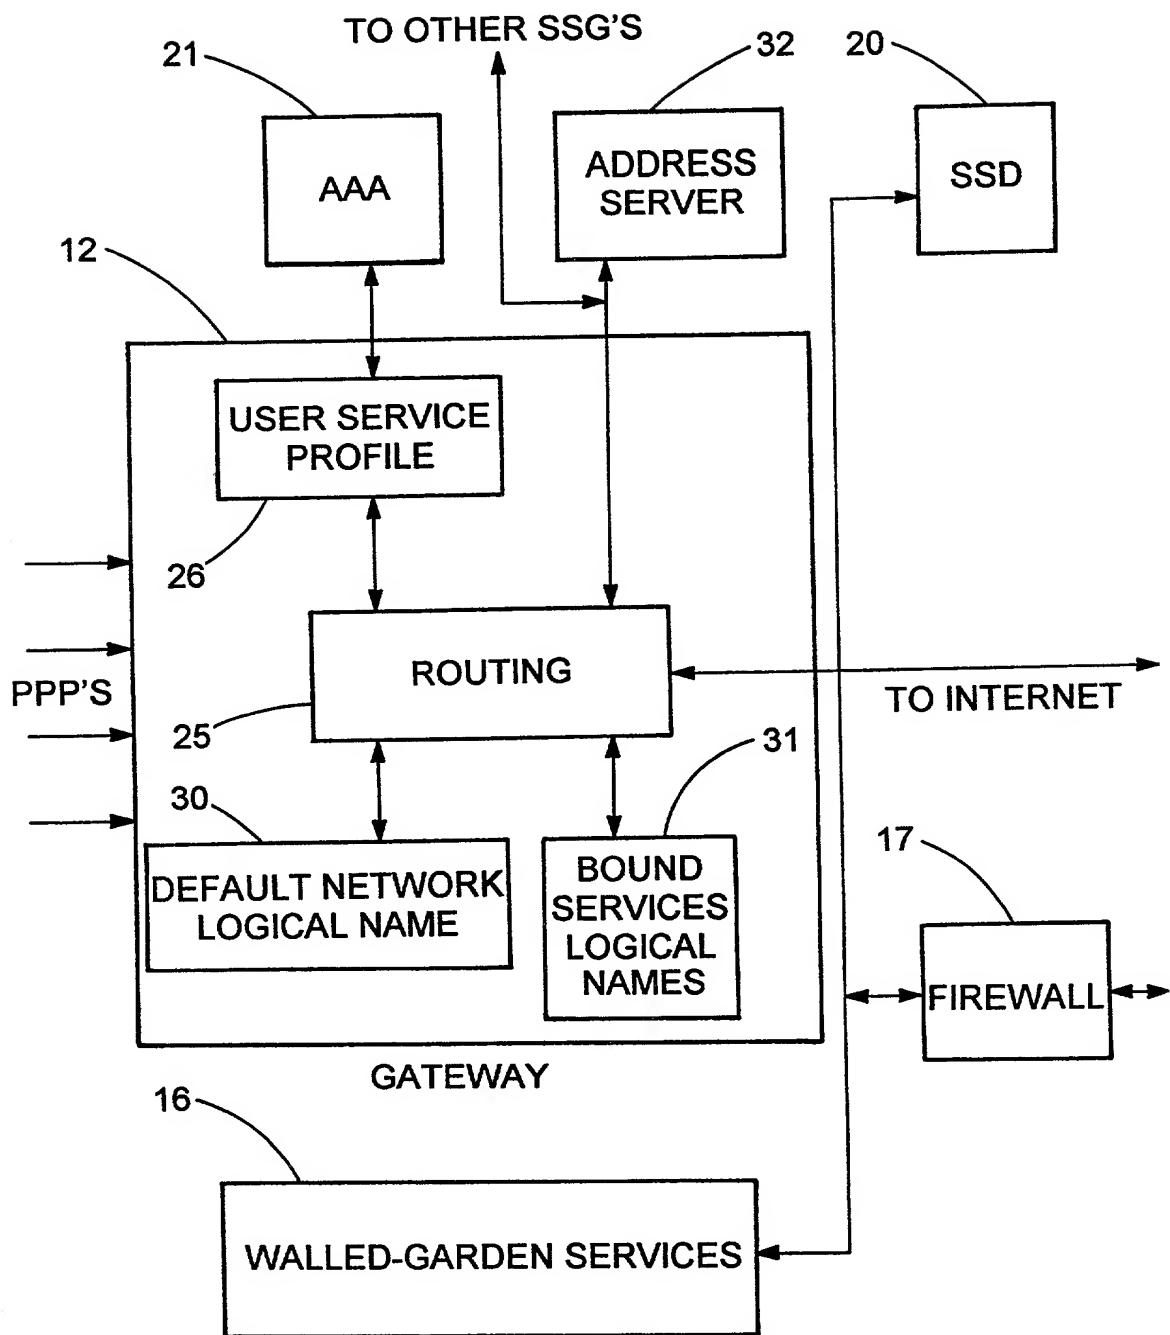


Fig. 4

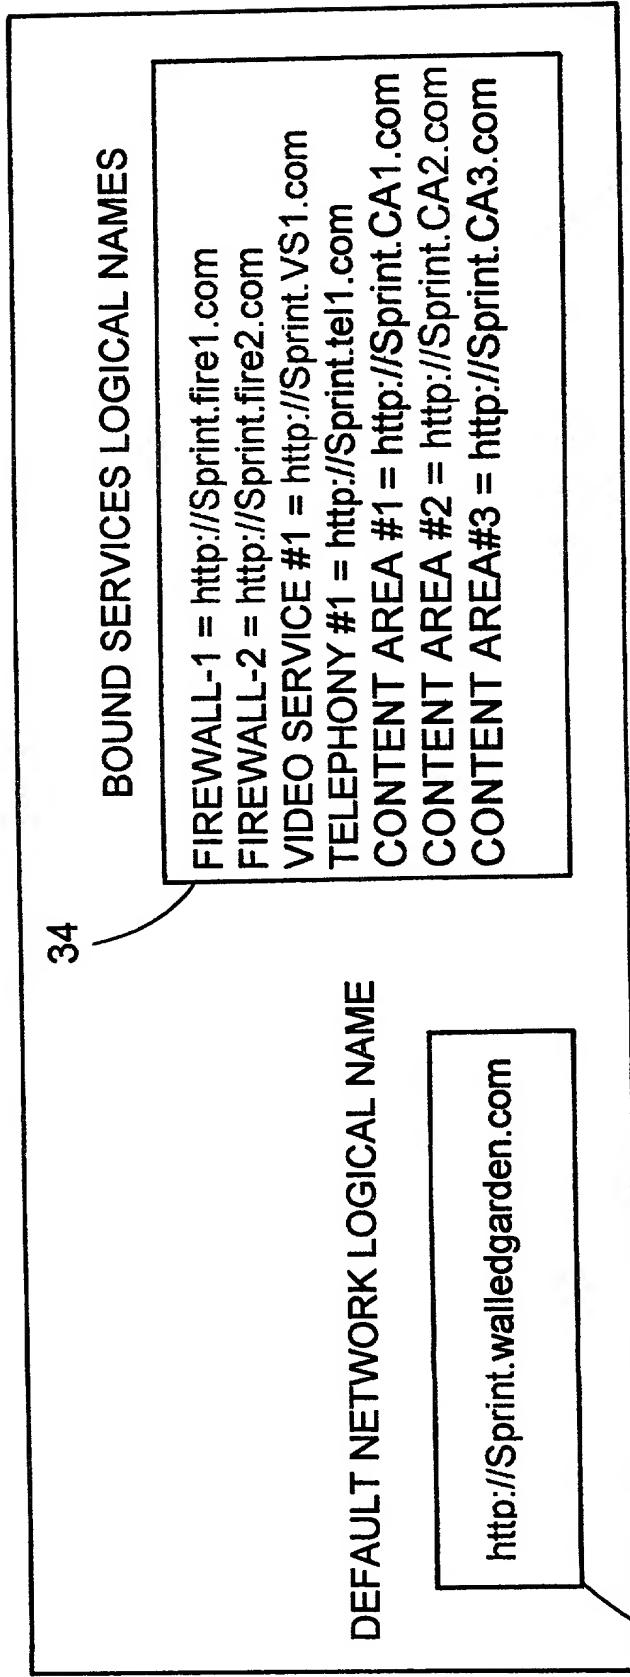


Fig. 5

ADDRESS SERVER TRANSLATION TABLE

`http://Sprint.fire1.com=aaa.aaa.aaa.aaa
http://Sprint.fire2.com=bbb.bbb.bbb.bbb
http://Sprint.VS1.com=ccc.ccc.ccc.ccc
http://Sprint.tel1.com=ddd.ddd.ddd.ddd
http://Sprint.CA1.com=eee.eee.eee.eee
http://SprintCA2.com=fff.fff.fff.fff
http://Sprint.CA3.com=ggg.ggg.ggg.ggg`

35

FIG. 6

RECONFIGURE SERVICE-OPTION
RESOURCES, RESULTING IN CHANGED
IP ADDRESSES

55

MODIFY STORED IP ADDRESSES ON
ADDRESS SERVER

56

FIG. 8

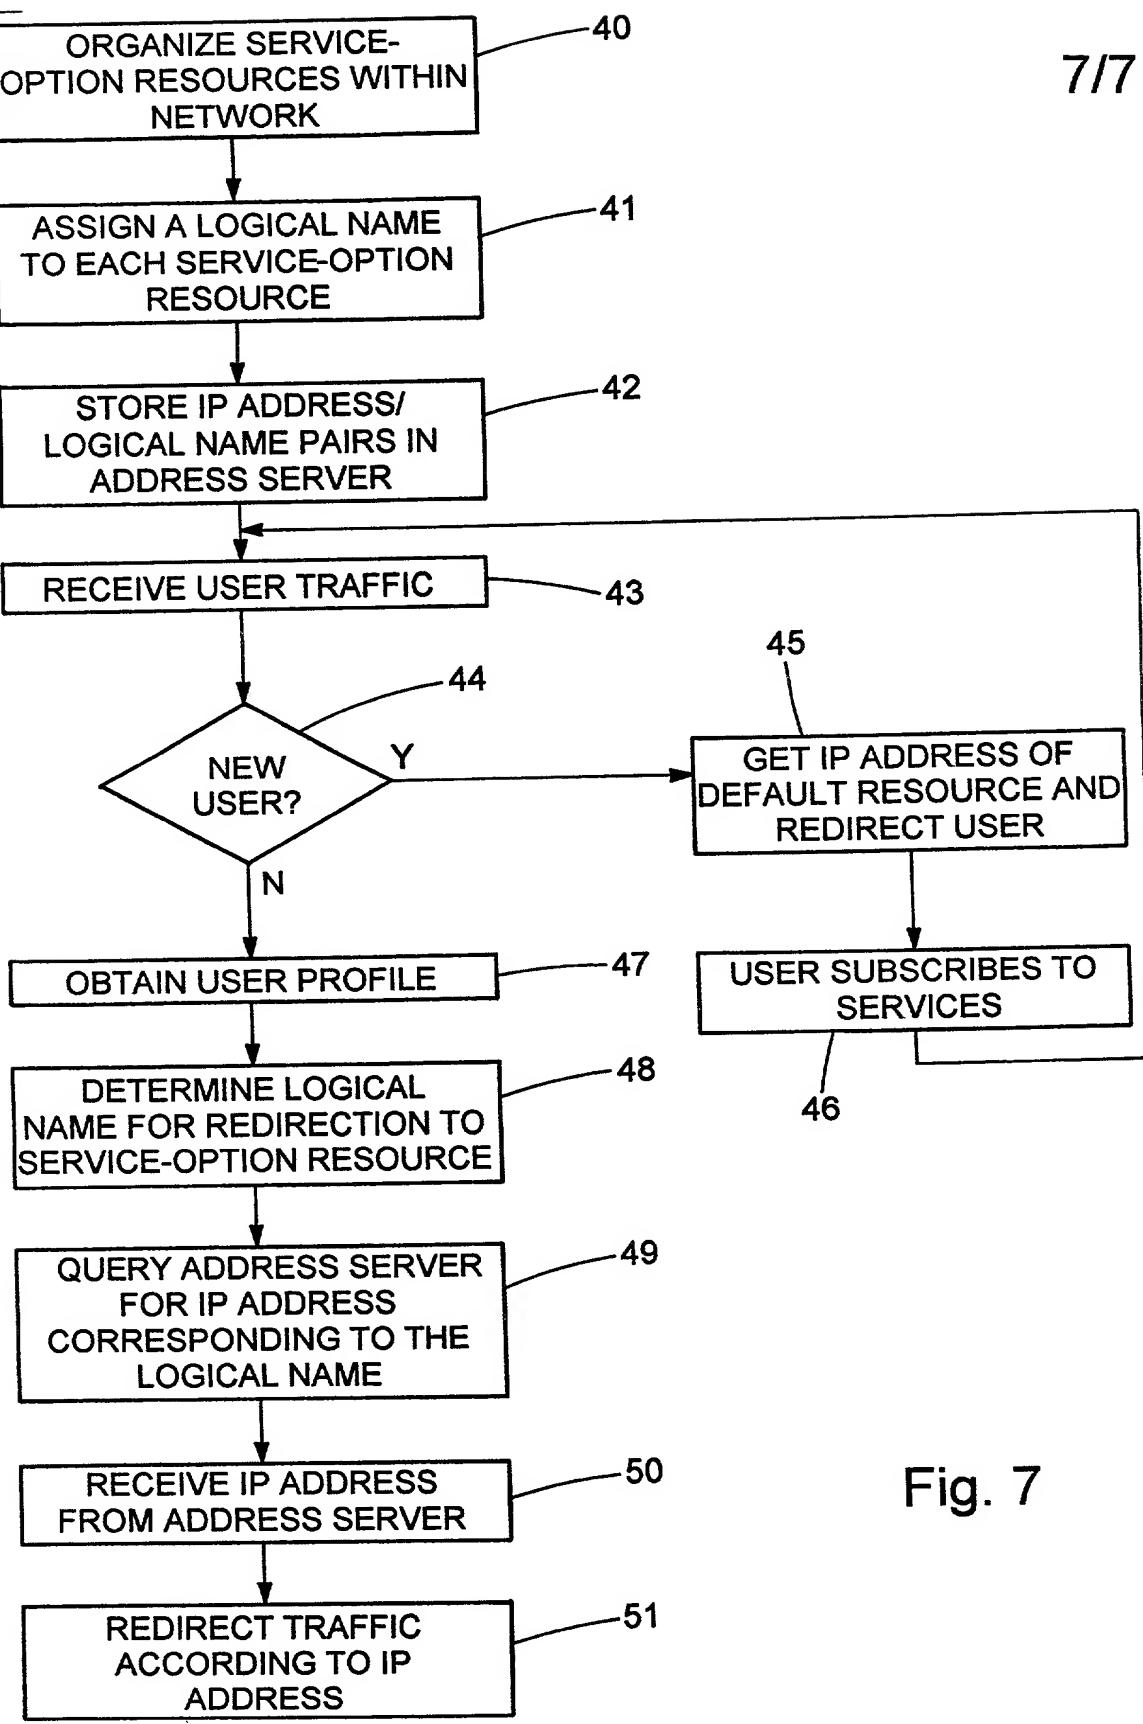


Fig. 7